
Version No.: 2024.03



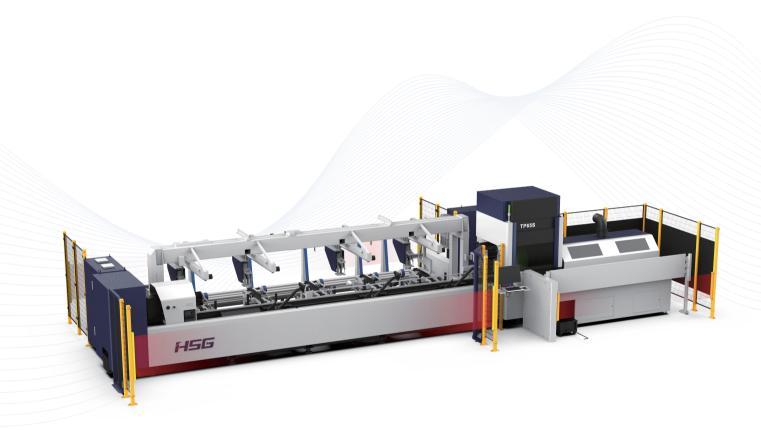

# **TPS**

Bevel Tube Laser Cutting Machine

## **....** Company Culture



Intelligent manufacturing changes future

VALUES

Customer-focused and employee-based

**S** VISION

Become a respectable enterprise in the global metal forming equipment field

## **....** Company Profile



19 Global Branches □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □ □
 □ □ □
 □ □ □
 □ □ □
 □ □ □
 □ □ □
 □ □ □
 □ □ □
 □ □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □ □
 □
 □ □
 □
 □
 □</



100+
Countries Covered



**4** Manufacturing Bases



**30+** Global Service Centers



8,000+
Annual Capability



135,000m<sup>2</sup> Occupied Area

# TPS 3000-6000W

## Bevel Tube Laser Cutting Machine



## Technical Parameters

Technical Parameter	TP65S
Power	3000-6000W
Rotating Speed of Chucks	120r/min
Max. Linkage Speed	140m/min
Max. Linkage Acceleration	1.2G
X/Y-axis Positioning Accuracy	±0.03mm/m
X/Y-axis Repositioning Accuracy	±0.03mm
Tailing Length	Tailings in Double-chuck Clamping Model≥220mm
Cutting Capacity	Round tubeΦ20 - Φ273mm Square tube□20*20 - □200*200mm Rectangular diagonal≤273mm
Weight of Single Tube	200kg
Overall Dimensions(L*W*H) with Loading Racks	12500*4700*2600mm
Optional	8m machine bed
Safety Certification	ETL, THX
The range of pipe material	1000-6500mm

<sup>\*</sup> Machine appearance, technical parameters, function description, data comparison shown in this page are from HSG in-house laboratory. All testing results and experimental data shall be subject to real machine.

## High Speed and Intelligent for Better Processing

- High Speed and Precise
   High-speed data transmission without time delay and strong positional energy control.
- High rotational Speed and Air Velocity
   Bus system and servo motor reduce unproductive time.





#### X9000 Bus-based Tube Cutting Control System


- Simple Interface
   Clear interface is convenient for users operating and shows
   cutting data in real time to save time and costs.
- Functional Integration Control
   A number of core functions are showed centrally on the interface to reduce operating steps and users can easily learn to operate.

## **Intelligent Digital Chucks**

- Closed-loop control and wireless data transmission in real time.
- Know claws clamping status and accurate tube size .
- Self-adaptive adjustment of clamping force.
- Stop immediately if empty or wrong tube is clamped, so as to lower work error rate.








## Powerful Functions Make You Never Spend Time Worrying

 Component Real-time Monitoring and Maintenance Alert All components are detected in real time to ensure the stable use and the system is equipped with maintenance alert for careful component management

## **LA4 Bevel Cutting Head**

• 0-45° bevel takes its shape once, for the convenience of subsequent welding and decrease of reprocessing costs.

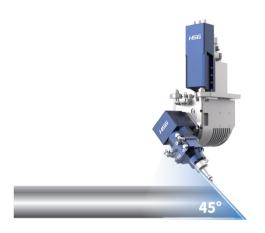




## **Tube Splicing Technology**


 The operating control offers 50+ kinds of tube splicing patterns, for convenience of subsequent welding, such as splicing of male and female head of square tube, 90° arc splicing, splicing of round tube tee, splicing of cut-through holes, 45° splicing of hexagon, splicing of angle iron and channel steel, etc.


#### **Machine Foundation**

\*The marked size has about 10mm error

The dimensions of the standard configuration of the machine are for reference only. Please refer to the three views of the order configuration for the actual machine dimensions.

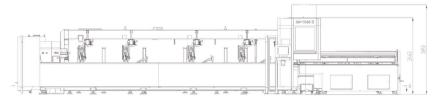





#### **:::** Cutting Samples



















### **Cutting Capacity**

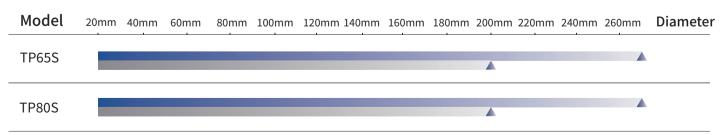





As a global enterprise, HSG sticks to providing professional and convenient service support to customers at home and board



#### **Professional Training**

Multiple technical training service and free operation training for customers and dealers in time



### **Efficient Support**

Humanistic service model, online services and 7\*24 hotline to offer solutions and assistance



#### **Optimized Transport**

Multi-channel transport solutions and professional transport solution team will provide various transport cases for to satisfy the demand of customers and save transports fees



#### **Sufficient Accessories**

Highly efficient accessories delivery service, multiple network inventory jointly responds to accessories demand to shorten customer's waiting times and accelerate production



#### **Careful Services**

Domestic door-to-door service and free proofing, global 100+dealers provide efficient and convenient services



### Intelligent Manufacturing Changes Future



Website



Facebook



Youtube

Headquarters Add.: No. 4, Anye Road, Shunjiang Community Industrial Park,

Beijiao Town, Shunde District, Foshan, Guangdong, China

Website: www.hsglaser.com Email: info@hsglaser.com Tel:+86 757-66833906